

Sanbra Fyffe Product Specification


BS1212 BALLVALVE RANGE

Product Name: 750013 - ½" HP BS 1 3/8" Tail x 8" Arm (Acetal Piston) Brass nuts
750014 - ½" HP BS 1 3/8" Tail x 6" Arm (Acetal Piston) Plastic nuts
750113 - ½" LP BS 1 3/8" Tail x 8" Arm (Acetal Piston) Brass nuts
750016- ½" HP BS 1 3/8" Tail x 8" Arm (Acetal Piston) Plastic nuts

Max Operating Temperature: 65°C

Max Working Pressure: 10 bar @ 20°C

- Available with plastic or brass locking nuts
- Forged Brass Body
- Use with Water Only

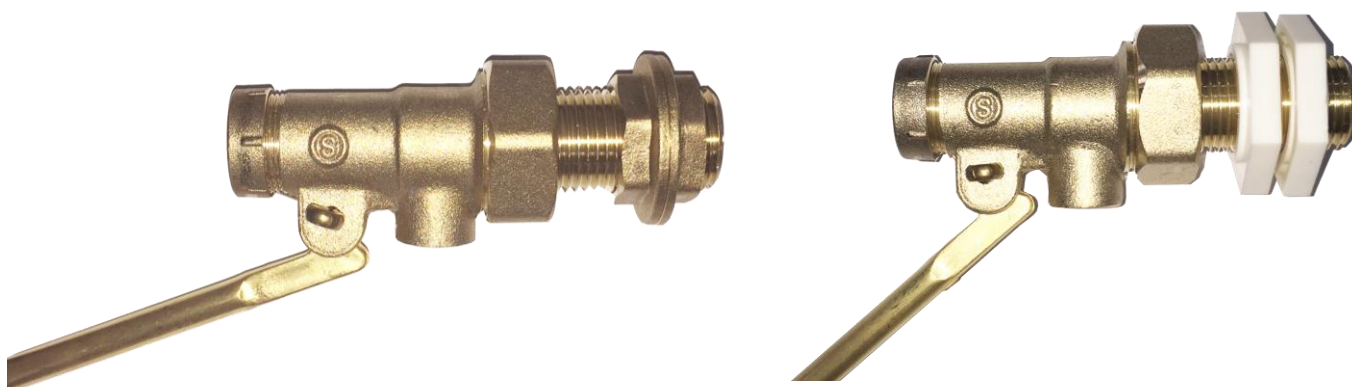

NOTE: Dublin Corporation Waterworks – “Regulations for Domestic Water Supply” states “A warning pipe to be efficient shall be of a capacity sufficient to carry away water at the full rate of inflow to the cistern and be so designed that it will have a proper fall along its length and be free of dips or traps so that water cannot be retained when overflowing has ceased” and “pipes should be suitably screened and from a cistern which is a closed vessel, this to prevent contamination and objects blocking pipes.”

Products are subject to a guarantee that is between Sanbra Fyffe and the final purchaser of the product and is subject to proof of purchase.

This guarantee does not affect any consumer statutory rights.

The guarantee covers manufacturing or material defects and does not cover parts subject to normal wear and tear.

This product range has been designed for the use of homeowners, domestic and commercial applications and therefore the guarantee is subject to the product being properly selected for their intended service conditions.

Provided the product is installed correctly and receives adequate preventative maintenance it should give years of trouble-free service.

Accidental damage or abuse to the product are not covered by this guarantee.

The extent of this liability is limited to the cost of the replacement of the defective item and not to fitting or any consequential damage.



“Quality Without Compromise”